


# Full Spectrum Sanctuary Outdoor 5 by Clearlight®

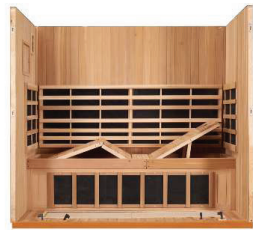

## Features

### Therapeutic Far Infrared Heaters

Our exclusive True Wave™ hybrid Carbon & Ceramic low EMF / low ELF heaters surround you in healing infrared heat.

### True Wave™ Full Spectrum Heaters

Our full spectrum infrared heaters deliver over 20 times the power of the nearest leading competitor. Our patented heating system allows for the deepest penetration with peak performance for the best results.

### Doctor Designed Recliner Bench

Relax in comfort in your sauna with our exclusive recliner or flat bench.

### Built For The Outdoors

Cedartec® exterior finish for durable outdoor use and Mahogany interior for that true sauna feel.

### Built-in Ergonomic Backrest

Relax close to the soothing infrared heat against the Chiropractor designed built-in ergonomic backrest.

### Built-in Charging and Audio Station

Charge your tablet or smartphone inside the sauna and connect your favorite audio device with Bluetooth or the included MP3 jack.

### Heated Floor

Stay warm from your head to your toes with our infrared heated floor.

### Combination Door Handle/tablet Cradle For Easy Media Viewing

Place your tablet on the door handle for easy viewing of your favorite shows or movies.



### Chromotherapy (Color Light Therapy)

Your Outdoor sauna comes standard with our therapeutic Chromotherapy.




### Enhanced Audio Sound System

Bluetooth and AUX inputs make it easy to connect and listen to your audio devices.



### Digital Keypad Controls




Never Fail™ digital keypad controls temperature, time, lights, heater intensity and reservation mode.




### Tablet/Smartphone Control (optional)

Log in from your tablet or smartphone and remotely operate your sauna.

# Full Spectrum Sanctuary Outdoor 5 by Clearlight®

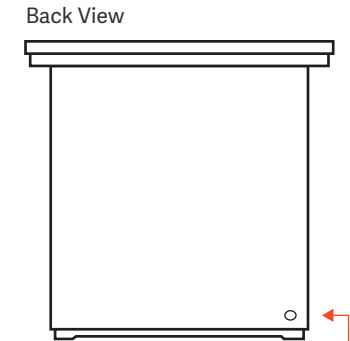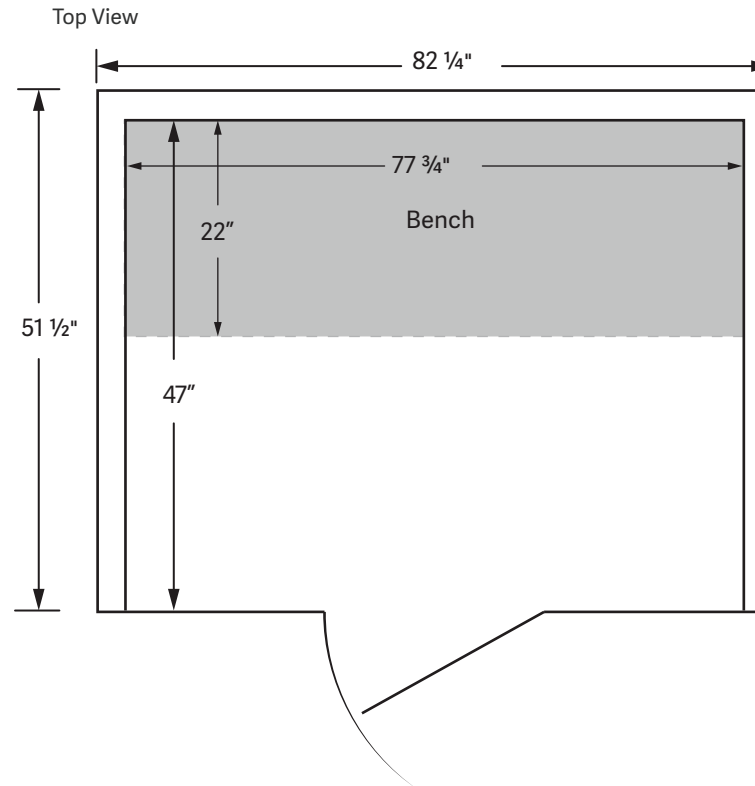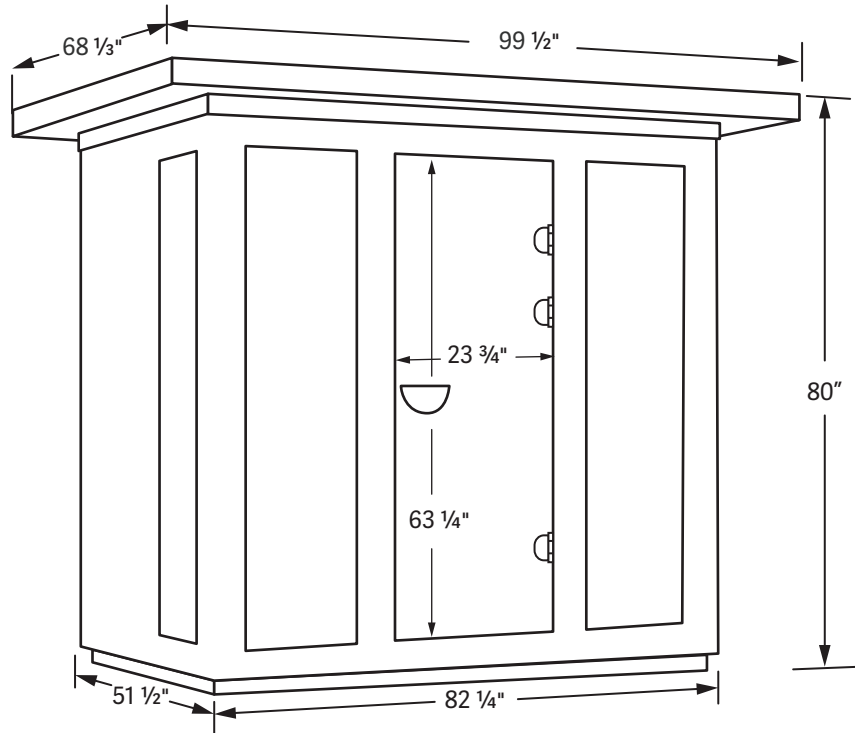

Power cord is located on the back of the sauna, six inches off the ground and is approximately six feet long.

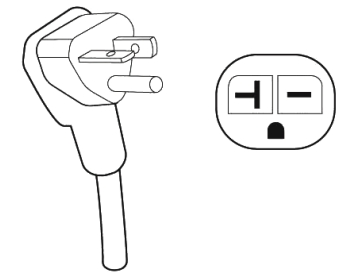

240volt / 20 amp NEMA 6-20 Plug

## Specifications

### Construction

Gray Cedartec® Eco-Certified Exterior  
Mahogany Interior  
Tongue & Groove Construction  
Weight: 1050 lbs  
Rated: IPX 4

### Exterior

Width: 82 1/4" \*  
Depth: 51 1/2" \*  
Height: 80"  
\* Roof Cap:  
99 1/2" x 68 1/2"

### Interior

Width: 76 3/4"  
Depth: 47"  
Height: 71 1/2"  
Bench: 77 1/4" x 22"  
recline/flat bench

### Heaters

True Wave™ Far  
Infrared and Full  
Spectrum Infrared  
Heaters Power: 240V /  
3,800W / 16A

### Limited Lifetime Residential Warranty

Heaters: Lifetime  
Electrical Controls: Lifetime  
Cabinetry & Glass: 5 Years



**Attention: Concrete or wooden foundation is needed as a base when placed outside**

# Full Spectrum Sanctuary Outdoor 5 by Clearlight®

## Individual panel sizes laying flat in inches

Panel	Length	Width	Height
Roof	51 ½	82 ½	3 ½
Floor	49	79 ¾	3 ¼
Left Side	71 ½	46 ½	4
Right Side	71 ½	46 ½	4
Back Wall	71 ½	82 ¼	5
Front Wall	71 ½	82 ¼	3
Overhang	68 ¼	98 ½	3 ¾

## What gauge wire are our saunas?

20 amp saunas are 12 AWG Single

Phase/3 wire: 2 x live/ground - for 240v



**Attention: Make sure sauna is assembled on a level surface. Not recommended for use where temperatures are regularly 20°F or below.**

## Additional Information

### Recommended Clearance

4" All Around if enclosing

### Add On

- Can't have both upgrade heater and Red Light simultaneously.
- Not VRT compatible

### Weather Precautions

1ft Snow limit, Wind Rating 35 MPH

### Surface Requirements

It is necessary to place sauna on a raised platform to ensure no water pools under it.

## Additional Build Information

### Roof Information

- Roof cap is 4" deep (top to bottom). The slope inside the roof is 15mm. The overhang at the back is 9 inches
- Height of the unit without the roof cap is 77 ¼" inches tall
- Top of roof is a silver color reflective roofing material
- From the floor to the bottom of the glass door is 6 ¾" inches

### Side Windows

16 ½" X 64" X 12"

### OD5 Front Windows

16 ½" X 64 ½" - Front Sides  
23 ¼" X 63 ¼" - Glass Door

### OD Wall Thickness

2 ½"

### Insulation Thickness

1 ½"

### Bench Specifications\*

Fixed Bench Height: 20"  
\*Flat or in Recline position